


	E-XLR8 (BL)
Frame sizes	50-54-57-60cm
Frame description	Lightweight super smooth welded semi-sloping/low step-through frame. Triple-buttet aluminium tubes. Down tube with internal shifter and brake cables and integrated headset.
Front fork	KOGA Pinza DB - Full Carbon
Headset	Industrial bearing - Integrated in frame
Colour	Matt Black
Handlebar	KOGA Oversized SportTouring alloy
Stem	KOGA Lightweight
Grips	Hermanns Adrenalin Ergo - Triple Density - Lockable
Shift lever (r)	Shimano SLX
Disc/Hydraulic brake set (f)	Magura MTE
Disc/Hydraulic brake set (r)	Magura MTE
Shifter cable	Stainless steel inner cable - Flexible outer cable with teflon tube for light shifting
Rotor front	Tektro airflow design ø 160 mm
Rotor rear	Tektro airflow design ø 160 mm
Chain	KMC X10e
Front hub	Shimano - Double contact sealing for low maintenance and increased service life
Rear hub	Shimano - Double contact sealing for low maintenance and increased service life
Tires	Vredestein PerfectE 40mm - Sportex Protection Layer® - Side reflection
Tube	Schwalbe
Rims	Mach 1 560
Rim tape	Hermanns innertube protective
Spokes	Mach 1
Saddle	KOGA
Seat post	KOGA alloy - Safety Clamp construction
Seat clamp	KOGA - Alloy
Crank set	Miranda 20T
Bottom bracket	Bosch BracketEngine 500W, 60Nm, 36V (System: Performance Line)
Pedals	KOGA SoleMate - Concaved anti slip layer - Industrial bearing - ED coated body
Cassette	Shimano HG-10 speed - Hyperglide for quick and smooth shifting - Sprockets: 11-13-15-17-19-21-24-28-32-36T
Rear derailleur	Shimano SLX shadow - Low profile design for more aggressive riding
Pump	KOGA Telescopic with alloy barrel - Schrader and Presta Fit - High Pressure/ Big Volume switch - Ergonomic hinge grip
Bell	Widex Compact
Chain guard	KOGA Defenz
Mudguard (f)	KOGA
Mudguard (r)	KOGA
Headlight	B&M Lumotec IQ Cyo - IQ Long life LED technology 40 Lux - Daylight function - KBA approved
Rear light	Busch&Müller Toplight Line - Long life LED Linetec technique: Improved distance estimation to Cyclist - KBA approved - Seperate brake/license plate light
Rear carrier	KOGA LoDo - Alloy hollow tubing max 25 kg - Durable finish
Rubber strap	Springclamp
Kickstand	Pletscher Comp - Superb stability - Powdercoated durable finish
Ring lock	Trelock RS 450 - ART ** Approved
Display	Bosch Intuvia
Battery	Bosch Li-Ion 500Wh (36V*13,4 Ah) Removable from DownTube
Accessories	HandlebarControl Unit
Gears	10

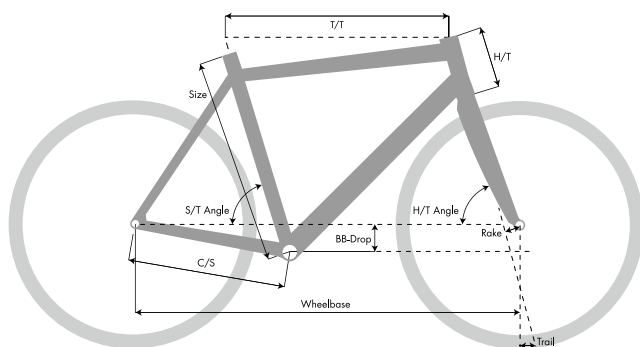

Size	T/T	C/S	Wheelbase	BB-Drop	Rake	H/T Angle	S/T Angle	Trail	H/T	Reach	Stack
50	575	467	1084	55	45	70,5	72,0	75	125	384	590
54	590	467	1077	55	45	71,5	71,0	68	140	381	608
57	605	467	1092	55	45	71,5	71,0	68	160	389	627
60	620	467	1107	55	45	71,5	71,0	68	185	396	651

© 2016 KOGA reserves the right to make changes to specifications and/or prices without further notice. Although this brochure has been compiled with the utmost care, no liability can be taken for any remaining errors of any type. Reproduction of this publication is prohibited unless expressly permitted in writing by KOGA.