


PACE S20

SPECIFICATIONS

WEIGHT	♂ 20.5 kg ♂ 20.7 kg
SIZES	♂ S-M-LXL ♂ S-M-L
COLOUR	Black metallic
FRAME	Super smooth welded double butted aluminium frame. Integrated battery, shifter and brake cables, headset and rear carrier.
FRONT FORK	KOGA full carbon rigid fork for 15x100 Thru Axle, with tapered steering tube 1.5-1 1/4
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Sport Bar Oversized full carbon with internal cable guidance
STEM	KOGA rigid Oversized
HANDLEBAR TAPE/GRIPS	KOGA Sport
DISC-/HYDRAULIC BRAKE SET (F)	Shimano Deore XT T8000 hydraulic disc brake, post mount type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano Deore XT T8000 hydraulic disc brake, post mount type
ROTOR FRONT	Shimano RT-81 180mm
ROTOR REAR	Shimano RT-EM800-M 160mm
SHIFT LEVER (R)	Shimano Deore XT Di2 M8050
CHAIN	KMC X11e-T Turbo
CRANK SET	KOGA
CASSETTE	Shimano CS-M8000 11 speed - 11-40T
REAR DERAILLEUR	Shimano Deore XT Di2 T8050 11-speed
WHEEL (F)	KOGA full carbon with 15x100 Thru Axle
WHEEL (R)	KOGA full carbon with 12x148 Thru Axle
TIRE (F)	Schwalbe Marathon Supreme 50-622
TIRE (R)	Schwalbe Marathon Supreme 50-622
TUBE	Continental Light
SADDLE	KOGA Sports
SEAT POST	KOGA full carbon 31.6 mm
MUDGUARD (F)	KOGA 58mm
MUDGUARD (R)	KOGA 58mm
HEADLIGHT	B&M IQX E 150 Lux
REAR LIGHT	B&M Integrated
REAR CARRIER	Racktime frame integrated
KICKSTAND	Pletcher Comp
BELL	Widex Compact
RING LOCK	Trelock RS 450 - ART ** Approved
PEDALS	KOGA Sole-Mate
PUMP	KOGA Telescopic
MOTOR	Shimano E-8000
BATTERY	Shimano Li-Ion 504Wh (36V*14Ah) Frame mount type, removable from frame
DISPLAY	Shimano E8000

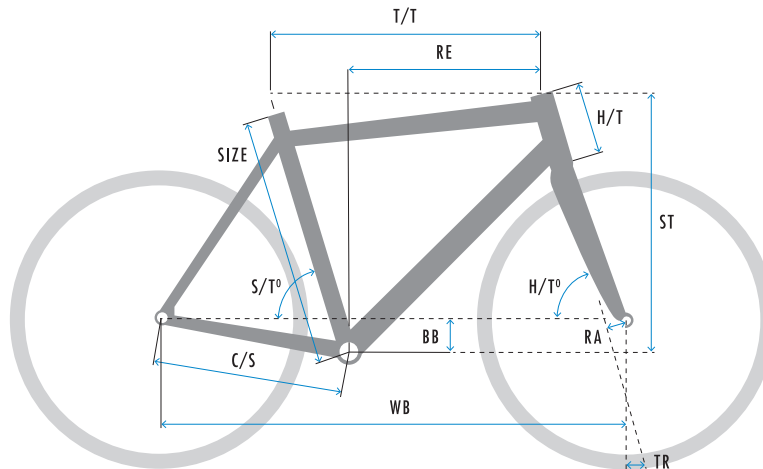

GEOMETRY

♂ GENTS

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
S	575	478,5	1119	55	51	69,0	72,0	82-85	150	380	601
M	585	478,5	1106	55	51	70,0	71,0	75-78	165	372	619
L	605	478,5	1127	55	51	70,0	71,0	75-78	180	387	633
XL	625	478,5	1147	55	51	70,0	71,0	75-78	200	400	652

♂ MIXED

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
S	570	478,5	1116	55	51	69,0	72,0	82-85	170	366	627
M	580	478,5	1102	55	51	70,0	71,0	75-78	185	359	642
L	600	478,5	1122	55	51	70,0	71,0	75-78	200	374	657