


SPECIFICATIONS

WEIGHT	♂ 16.9 kg ♀ 17.3 kg
SIZES	♂ S-M-L-XL-XXL ♀ XS-S-M-L-XL
COLOUR	Onix high gloss
FRAME	Super smooth welded premium 6061 aluminium with eccentric bottom bracket. Fully internal shifter, brake and lighting cables. KOGA Light Design. Integrated headset with steering limiter.
FRONT FORK	KOGA alloy Feathershock 2.0 - 30mm travel with integrated steering limiter
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Ergosport Touring alloy
STEM	KOGA adjustable with integrated cable guidance
HANDLEBAR TAPE/GRIPS	KOGA Sport
DISC-/HYDRAULIC BRAKE SET (F)	Shimano MT201/UR300 hydraulic disc brake, FM type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano MT201 hydraulic disc brake, FM type
ROTOR FRONT	Shimano RT-54 160mm
ROTOR REAR	Shimano RT-54 160mm
INTERNAL GEAR HUB	Shimano Nexus 8
SHIFT LEVER (R)	Shimano Nexus 8
CHAIN	Gates Carbondrive CDN Belt
CRANK SET	Gates Carbondrive FC-S550 CDX
BOTTOM BRACKET	Gates
CASSETTE	Gates CDC 24T
FRONT HUB	Shutter Precision PL-7
TIRE (F)	Schwalbe Spicer Plus 40-622
TIRE (R)	Schwalbe Spicer Plus 40-622
TUBE	Schwalbe
RIM (F)	Ryde Rival21 Disc
RIM (R)	Ryde Rival21 Disc
SPOKES	Sapim Strong
SADDLE	Selle Royal Vivo Ergo
SEAT POST	KOGA alloy shock absorbing suspension seat post 27.2 mm
CHAIN GUARD	KOGA
MUDGUARD (F)	KOGA 46mm
MUDGUARD (R)	KOGA 46mm
HEADLIGHT	KOGA Premium Integrated
REAR LIGHT	KOGA Integrated
REAR CARRIER	KOGA F3 with MIK system
KICKSTAND	Ursus Mooi
BELL	KOGA Compact
RING LOCK	AXA Victory ART ** Approved
PEDALS	KOGA Sole-Mate

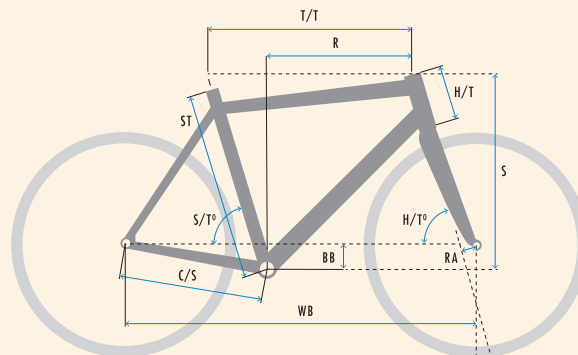

GEOMETRY

♂ GENTS

♀ LADIES

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	H/T	R	S	SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	H/T	R	S
S	500	600	460	1100	60	45	70.5	72.0	125	402	608	XS	470	590	460	1091	60	45	70.5	72.0	140	388	622
M	540	615	460	1092	60	45	71.5	71.0	140	399	627	S	500	600	460	1101	60	45	70.5	72.0	140	398	622
L	570	630	460	1107	60	45	71.5	71.0	155	409	641	M	530	610	460	1111	60	45	70.5	72.0	155	403	637
XL	600	645	460	1122	60	45	71.5	71.0	185	415	669	L	560	620	460	1097	60	45	71.5	71.0	170	394	655
XXL	630	660	460	1137	60	45	71.5	71.0	200	425	684	XL	590	630	460	1107	60	45	71.5	71.0	185	400	669