


## SPECIFICATIONS

<b>WEIGHT</b>	△ 14.6 kg ▽ 15.0 kg
<b>SIZES</b>	△ S(50)-M(54)-L(57)-XL(60)-XXL(63) ▽ S(50)-M(53)-L(56)-XL(59)
<b>COLOUR</b>	Ivory High Gloss
<b>FRAME</b>	Super smooth welded premium 6061 aluminium with replaceable rear derailleur hanger. Fully internal shifter, brake and lighting cables. KOGA Light Design. Integrated headset with steering limiter.
<b>FRONT FORK</b>	KOGA full carbon for Disc brake with integrated mudguard attachment and steering limiter
<b>HEADSET</b>	Industrial bearing - Integrated in frame
<b>HANDLEBAR</b>	KOGA Riser alloy
<b>STEM</b>	KOGA rigid with integrated cable guidance
<b>HANDLEBAR TAPE/GRIPS</b>	KOGA Sport
<b>DISC-/HYDRAULIC BRAKE SET (F)</b>	Shimano RS600 hydraulic disc brake, FM type
<b>DISC-/HYDRAULIC BRAKE SET (R)</b>	Shimano RS600 hydraulic disc brake, FM type
<b>ROTOR FRONT</b>	Shimano RT-70 160mm
<b>ROTOR REAR</b>	Shimano RT-70 160mm
<b>SHIFT LEVER (R)</b>	Shimano Deore XT T8000
<b>SHIFT LEVER (L)</b>	Shimano Deore XT T8000
<b>CHAIN</b>	KMC X10EL
<b>CRANK SET</b>	Shimano Deore XT T8000 48-36-26T for 10-speed
<b>BOTTOM BRACKET</b>	Shimano BSA
<b>CASSETTE</b>	Shimano HG-81 10 speed - 11-32T
<b>REAR DERAILLEUR</b>	Shimano Deore XT T8000 10-speed
<b>FRONT DERAILLEUR</b>	Shimano Deore XT T8000 for 3x10-speed
<b>FRONT HUB</b>	Shutter Precision PL-7
<b>REAR HUB</b>	Shimano Deore XT M8010 Disc
<b>TIRE (F)</b>	Schwalbe Marathon Racer 40-622
<b>TIRE (R)</b>	Schwalbe Marathon Racer 40-622
<b>TUBE</b>	Schwalbe
<b>RIM (F)</b>	Ryde Rival21 Disc
<b>RIM (R)</b>	Ryde Rival21 Disc
<b>SPOKES</b>	Sapim Strong
<b>SADDLE</b>	B&M Eyc 50 Lux
<b>SEAT POST</b>	Spanninga Plateo
<b>MUDGUARD (F)</b>	KOGA 46 mm
<b>MUDGUARD (R)</b>	KOGA 46 mm
<b>HEADLIGHT</b>	KOGA Premium Integrated
<b>REAR LIGHT</b>	KOGA Integrated
<b>REAR CARRIER</b>	KOGA F3 with MIK system
<b>KICKSTAND</b>	Ursus Mooi
<b>BELL</b>	KOGA Compact
<b>RING LOCK</b>	AXA Victory ART ** Approved
<b>PEDALS</b>	KOGA Sole-Mate

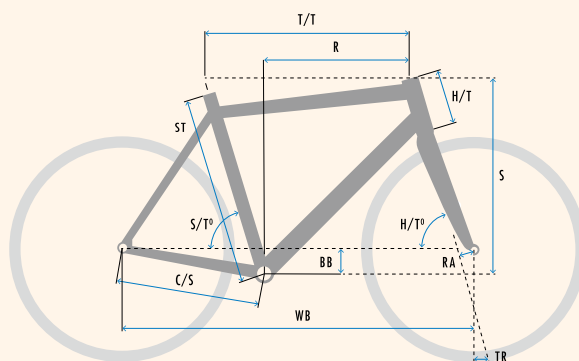

## GEOMETRY

△ GENTS

▽ MIXED

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S	SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
S	500	600	460	1100	60	45	70.5	72	-	125	402	608	S	500	600	460	1101	60	45	70.5	72	-	155	393	637
M	540	615	460	1092	60	45	71.5	71	-	140	399	627	M	530	610	460	1112	60	45	70.5	72	-	170	399	651
L	570	630	460	1107	60	45	71.5	71	-	155	409	641	L	560	620	460	1097	60	45	71.5	71	-	170	394	655
XL	600	645	460	1122	60	45	71.5	71	-	185	415	669	XL	590	630	460	1107	60	45	71.5	71	-	185	400	669
XXL	630	660	460	1137	60	45	71.5	71	-	200	425	684													