


PACE B05 LTD

SPECIFICATIONS

WEIGHT	♂ 23.7 kg ♂ 23.7 kg
SIZES	♂ S-M-L-XL ♂ S-M-L
COLOUR	Reflex Blue high gloss
FRAME	Super smooth welded double butted aluminium frame. Integrated battery, shifter and brake cables, headset and rear carrier.
FRONT FORK	KOGA alloy rigid fork for 15x100 Thru Axle, with tapered steering tube 1.5-1 1/4 and internal cable routing
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Riser alloy
STEM	KOGA adjustable Oversized
HANDLEBAR TAPE/GRIPS	KOGA Sport
DISC-/HYDRAULIC BRAKE SET (F)	Shimano MT401 hydraulic disc brake, IS type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano MT400 hydraulic disc brake, IS type
ROTOR FRONT	Shimano RT-54 180mm
ROTOR REAR	Shimano RT-54 160mm
SHIFT LEVER (R)	Shimano Deore XT M8000
CHAIN	KMC X11e-T Turbo
CRANK SET	KOGA
CASSETTE	Shimano CS-M7000 11 speed - 11-40T
REAR DERAILLEUR	Shimano Deore XT M8000 11-speed
FRONT HUB	KOGA Disc for 15x100 Thru Axle
REAR HUB	KOGA E-bike specific Disc for 12x148 Thru Axle
TIRE (F)	Schwalbe Big Ben 50-622
TIRE (R)	Schwalbe Big Ben 50-622
TUBE	Schwalbe
RIM (F)	Ryde Rival 21 Disc
RIM (R)	Ryde Rival 21 Disc
SPOKES	Sapim Strong
SADDLE	Selle Royal Vivo Ergo
SEAT POST	KOGA alloy 31.6 mm
CHAIN GUARD	Hesling Move
MUDGUARD (F)	KOGA 58 mm
MUDGUARD (R)	KOGA 58 mm
HEADLIGHT	B&M IQ-XS 70 Lux
REAR LIGHT	B&M Toplight 2C plus
REAR CARRIER	Racktime frame integrated
KICKSTAND	Pletcher Comp
BELL	Widek Compact
RING LOCK	Trelock RS 450 - ART ** Approved
PEDALS	KOGA Sole-Mate
PUMP	KOGA Telescopic
MOTOR	Bosch Performance Line Gen3
BATTERY & CHARGER	Bosch Li-Ion 500Wh (36V*13.4Ah) Frame mount type, removable from frame. Charger 4Ah.
DISPLAY SET	Bosch KIOX

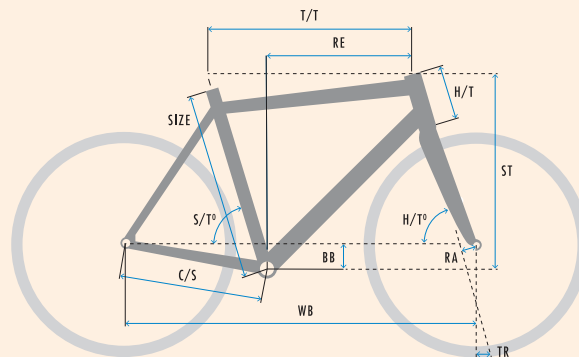

GEOMETRY

♂ GENTS

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
S	575	478.5	1119	55	51	69.0	72.0	82-85	150	380	601
M	585	478.5	1106	55	51	70.0	71.0	75-78	165	372	619
L	605	478.5	1127	55	51	70.0	71.0	75-78	180	387	633
XL	625	478.5	1147	55	51	70.0	71.0	75-78	200	400	652

♂ MIXED

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
S	570	478.5	1116	55	51	69.0	72.0	82-85	170	366	627
M	580	478.5	1102	55	51	70.0	71.0	75-78	185	359	642
L	600	478.5	1122	55	51	70.0	71.0	75-78	200	374	657