


<b>WEIGHT</b>	♂ 24.9 kg ♀ 25.0 kg
<b>SIZES</b>	♂ M - L - XL - XXL ♀ S - M - L - XL
<b>COLOUR</b>	♂ Clay Grey High Gloss ♀ Dover White High Gloss
<b>FRAME</b>	Lightweight super smooth welded double butted aluminium frame. Integrated shifter and brake cables, headset and integrated battery design. Max tyre width 50mm.
<b>FRONT FORK</b>	KOGA alloy Feathershock 2.0 - 30mm travel, thru Axle 15x100
<b>HEADSET</b>	Industrial bearing - Integrated in frame
<b>HANDLEBAR</b>	KOGA Ergosport Touring alloy
<b>STEM</b>	KOGA adjustable Oversized
<b>HANDLEBAR TAPE/GRIPS</b>	KOGA Ergonomic
<b>DISC-/HYDRAULIC BRAKE SET (F)</b>	Shimano MT201/UR300 hydraulic disc brake, FM type
<b>DISC-/HYDRAULIC BRAKE SET (R)</b>	Shimano MT201/UR300 hydraulic disc brake, FM type
<b>ROTOR FRONT</b>	Shimano RT-30 160mm
<b>ROTOR REAR</b>	Shimano RT-30 160mm
<b>SHIFT LEVER (R)</b>	Shimano Deore SL-M5100
<b>CHAIN</b>	KMC X11e-T Turbo
<b>CRANK SET</b>	Shimano FC-EM600, Shimano SM-CRE80 chainring 44T
<b>CASSETTE</b>	Shimano CS-M5100 11-speed - 11-42T
<b>REAR DERAILLEUR</b>	Shimano Deore RD-M5120 11-speed
<b>FRONT HUB</b>	KOGA Disc for 15x100 Thru Axle
<b>REAR HUB</b>	KOGA E-bike specific Disc for 12x148 Thru Axle
<b>TIRE (F)</b>	Schwalbe Energizer Active Plus 50-622
<b>TIRE (R)</b>	Schwalbe Energizer Active Plus 50-622
<b>TUBE</b>	Schwalbe
<b>RIM (F)</b>	Ryde Rival 21 Disc
<b>RIM (R)</b>	Ryde Rival 21 Disc
<b>SPOKES</b>	Sapim Leader
<b>SADDLE</b>	Selle Royal Ariel Skingel
<b>SEAT POST</b>	KOGA alloy foldable/shock absorbing suspension seat post 27.2 mm
<b>CHAIN GUARD</b>	KOGA Arrow
<b>MUDGUARD (F)</b>	KOGA 55mm
<b>MUDGUARD (R)</b>	KOGA 55mm
<b>HEADLIGHT</b>	B&M Eyc 50 Lux
<b>REAR LIGHT</b>	AXA JUNO-E
<b>REAR CARRIER</b>	KOGA Vectro with MIK system
<b>KICKSTAND</b>	Pletcher Comp
<b>BELL</b>	Widex ebike Black
<b>RING LOCK</b>	AXA Victory ART ** Approved
<b>PEDALS</b>	KOGA Sole-Mate
<b>PUMP</b>	KOGA Telescopic
<b>MOTOR</b>	Shimano EP600
<b>DISPLAY SET</b>	Shimano EP600 SC-EN610

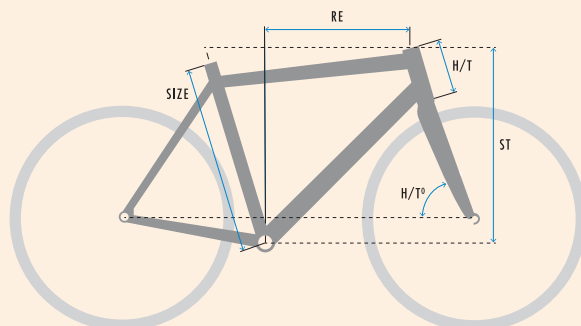

## GEOMETRY

♂ GENTS

♀ LADIES

SIZE	RE	ST	H/T	H/T°	SIZE	RE	ST	H/T	H/T°
530	383.3	636.3	140	70.5	500	360.9	643.5	150	70
560	390.7	659.5	160	71.5	530	362.4	648.2	155	70
590	388	683.2	185	71.5	560	367.1	655.1	160	70.5
620	393.4	697.4	200	71.5	590	371.1	664.5	170	70.5