


WorldTraveller29 (WT)	
Frame sizes	46-51-56cm
Frame description	Completely hand-built lightweight Smooth TIG-welded frame. Tubes manufactured in triple-hardened and triple-buttet 6069 aluminium. Equipped with: integrated headset, replaceable rear derailleur hanger and Koga neoprene chainstay protector.
Front fork	Koga - Alloy
Headset	Industrial bearing - Integrated in frame
Colour	Warm Grey Metallic
Handlebar	Koga Riser alloy - Lightweight Double Butted
Stem	Koga Justera - Adjustable A-head
Grips	Ergon with integrated bar ends
Shift lever (r)	Shimano SLX Rapidfire Plus - Two Way release - Optical gear display
Shift lever (l)	Shimano SLX Rapidfire Plus - Two Way release - Optical gear display
Disc-/Hydraulic brake set (f)	Magura HS-11 Hydraulic rimbrake - Excellent braking power maintenance free - Turbo Pad Adjustment - Reach Adjust - Easy Bleed Technology
Disc-/Hydraulic brake set (r)	Magura HS-11 Hydraulic rimbrake - Excellent braking power maintenance free - Turbo Pad Adjustment - Reach Adjust - Easy Bleed Technology
Shifter cable	Stainless steel inner cable - Flexible outer cable with PTFE tube for light shifting
Chain	KMC X10SL Durable Diamond Like Coating
Front hub	Shimano DH-3N72 6V/3,0W - Lightweight sporthub - Low rotating friction - Quick Release
Rear hub	Shimano XT - Double contact sealing for low maintenance and increased service life
Tires	Vredestein Perfect Trek 47mm - Sportex Protection Layer® - Side reflection
Tube	Koga
Rims	Koga KM21-622 XStrong alloy - Double wall and double eyeletted 36/40 holes - Durable finished
Rim tape	Hermanns innertube protective
Spokes	Sapim stainless - Cold forged reinforced
Saddle	Koga
Seat post	Koga alloy - Safety Clamp construction
Seat clamp	Koga - Alloy
Crank set	Shimano 2-Piece - UltraLightweight - Hyperdrive chainrings for smooth and precise shifting: 44x32x24T - Chaincase compatible
Pedals	Koga Sole-Mate - Concaved anti slip layer - Industrial bearing - ED coated body
Cassette	Shimano Deore HG-62 10 speed - Hyperglide for quick and smooth shifting - Sprockets: 11-13-15-17-19-21-23-26-30-34T
Rear derailleur	Shimano SLX shadow - Low profile design for more aggressive riding
Front derailleur	Shimano DeoreSLX
Derailleur guard	Koga Q-guard: combined Quick Release and rear derailleur protection
Pump	Topeak Roadmorph Small - Frame mounted floor pump - Ergonomic hinge grip
Bottle	Koga alloy 2x - Hygienic innerlayer - Easy refill
Bottle holder	Zefal Wiiz
Bell	Widex Decibel II with compass
Mudguard (f)	SKS P-55
Mudguard (r)	SKS P-55 - Integrated rear light wiring
Headlight	B&M Lumotec IQ Cyo Senso Plus - Premium IQ Long life LED technology with 60 Lux - Daylight and Standlight function - KBA approved
Rear light	Busch&Müller Toplight Line - Long life LED Linetec technique: Improved distance estimation to Cyclist - Standlight function - Standlight On/Off function - KBA approved
Dynamo	Hub
Rear carrier	Tubus logo frame integrated - Steel tubing max 40 kg - High/Low bag position - Durable black powdercoated finish - 10 years guarantee
Low-rider	Tubus Ergo - Steel tubing max 15 kg - Kickstand mounting points - Durable black powdercoated finish - 10 years guarantee
Low-rider kickstand	Koga - Stability under wind or weight load
Rubber strap	Koga TriFlex
Kickstand	Pletscher Comp - Superb stability - Powdercoated durable finish
Ring lock	Trelack RS 450 balloon - ART ** Approved
Weight	16.6
Gears	30

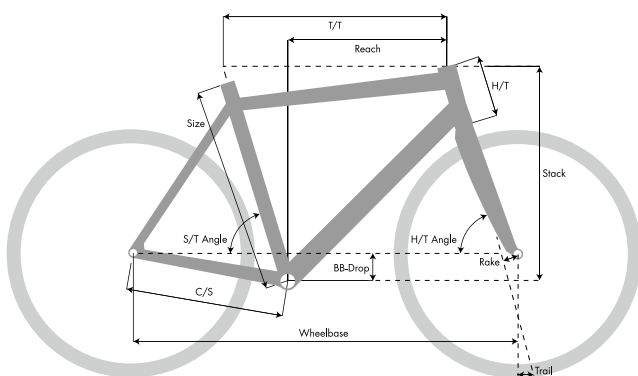

Size	T/T	C/S	Wheelbase	BB-Drop	Rake	H/T Angle	S/T Angle	Trail	H/T	Reach	Stack
46	587	462	1117	60,0	50	70,0	73,5	73	120	411	595
51	608	462	1139	60,0	50	70,0	73,5	73	130	429	604
56	631	462	1162	60,0	50	70,0	73,5	73	140	449	614