


F3 2.1 R

SPECIFICATIONS

WEIGHT	♂ 13.9 kg ♀ 14.2 kg
SIZES	♂ 50-54-57-60-63cm ♀ 47-50-53-56-59cm
COLOUR	Off Black matt
FRAME	Smooth welded frame. Triple-buttet hydroformed aluminium tubes. Down tube with internal shifter and brake cables, tapered headtube with integrated 1 1/8"/1 1/4" headset, integrated rear carrier and mudguard attachment and replaceable rear derailleur hanger.
FRONT FORK	KOGA alloy rigid fork with integrated headlight and mudguard attachment
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Oversized SportTouring alloy
STEM	KOGA Justera adjustable
HANDLEBAR TAPE/GRIPS	KOGA Ergonomic
MECHANICAL BRAKE (FRONT)	Shimano Alivio T4000 V-brake
MECHANICAL BRAKE (REAR)	Shimano Alivio T4000 V-brake
BRAKE LEVER (R)	Tektro RS with 2-finger lever
BRAKE LEVER (L)	Tektro RS with 2-finger lever
SHIFT LEVER (R)	Shimano Deore T6000
SHIFT LEVER (L)	Shimano Deore T6000
CHAIN	KMC X10-93
CRANK SET	Shimano T520 44-32-24T for 10-speed
BOTTOM BRACKET	Shimano Sealed cartridge Octalink
CASSETTE	Shimano HG-500 10 speed - 12-28T
REAR DERAILLEUR	Shimano Deore T6000 10-speed
FRONT DERAILLEUR	Shimano Deore T6000 for 3x10-speed
FRONT HUB	Shimano Dynamo Hub Nexus C3000
REAR HUB	Shimano Deore T610
TIRE (F)	Schwalbe Spicer 40-622
TIRE (R)	Schwalbe Spicer 40-622
TUBE	Schwalbe
RIM (F)	Mach1 550
RIM (R)	Mach1 550
SPOKES F1	Mach1 Plus
SADDLE	Selle Royal Lookin
SEAT POST	KOGA alloy 27,2mm
MUDGUARD (F)	KOGA 46mm
MUDGUARD (R)	KOGA 46mm
HEADLIGHT	B&M Eyc 50 Lux
REAR LIGHT	Spanninga Plateo
REAR CARRIER	Racktime frame integrated
KICKSTAND	Atran Velo Move
BELL	Widek Compact
PEDALS	KOGA Sole-Mate
PUMP	KOGA Telescopic

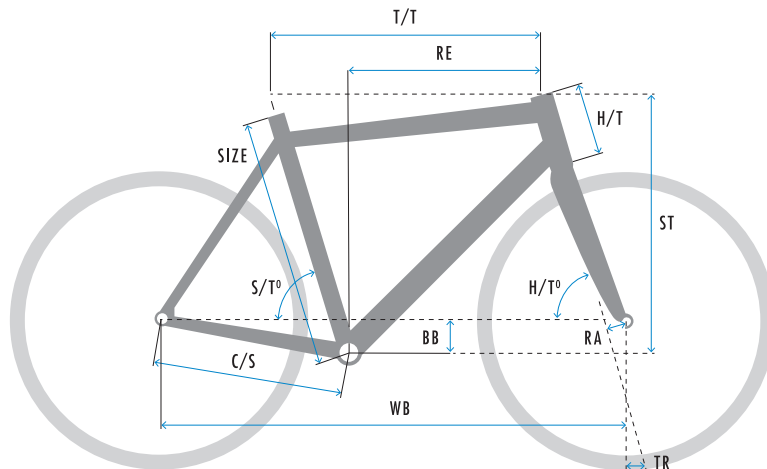

GEOMETRY

♂ GENTS

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
50	575	457	1074	55	45	70,5	72,0	75	115	389	572
54	590	457	1067	55	45	71,5	71,0	68	135	385	595
57	605	457	1082	55	45	71,5	71,0	68	155	394	614
60	620	457	1097	55	45	71,5	71,0	68	180	400	638
63	635	457	1112	55	45	71,5	71,0	68	210	405	667

♀ LADIES

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
47	566	457	1065	69	45	70,5	72,0	75	135	369	606
50	573	457	1073	69	45	70,5	72,0	75	145	373	615
53	580	457	1080	69	45	70,5	72,0	75	155	377	625
56	587	457	1057	69	45	71,5	71,0	68	165	367	638
59	594	457	1064	69	45	71,5	71,0	68	180	369	653