


	SuperMetro (G) (SPM)	SuperMetro (M) (SPL)
Frame sizes	46-50-54-57-60cm	47-50-53-56cm
Frame description	Completely hand-built Smooth TIG-welded frame. Tubes manufactured in triple-hardened and triple-buttet 6061 aluminium. Down tube with integrated shifter and brake cables. Equipped with: Tapered headtube with integrated 1 1/8"/1 1/4" headset, rear carrier, replaceable rear derailleur hanger and basements for all accessories.	Completely hand-built Smooth TIG-welded frame. Tubes manufactured in triple-hardened and triple-buttet 6061 aluminium. Down tube with integrated shifter and brake cables. Equipped with: Tapered headtube with integrated 1 1/8"/1 1/4" headset, rear carrier, replaceable rear derailleur hanger and basements for all accessories.
Front fork	KOGA Feather Lightweight - Ball bearing guided suspension fork - Travel 35 mm	KOGA Feather Lightweight - Ball bearing guided suspension fork - Travel 35 mm
Headset	Industrial bearing - Integrated in frame	Industrial bearing - Integrated in frame
Colour	Matt Black	Matt Black
Handlebar	KOGA alloy - Lightweight Double Butted	KOGA alloy - Lightweight Double Butted
Stem	KOGA - Adjustable - A-head	KOGA - Adjustable - A-head
Grips	KOGA Supergrips with anodized end caps	KOGA Supergrips with anodized end caps
Shift lever (r)	Shimano SLX Rapidfire Plus - Two Way release - Optical gear display	Shimano SLX Rapidfire Plus - Two Way release - Optical gear display
Disc-/Hydraulic brake set (f)	Tektro Orion	Tektro Orion
Disc-/Hydraulic brake set (r)	Tektro Orion	Tektro Orion
Shifter cable	Stainless steel inner cable -Flexible outer cable with PTFE tube for light shifting	Stainless steel inner cable -Flexible outer cable with PTFE tube for light shifting
Rotor front	Tektro airflow design ø 160 mm	Tektro airflow design ø 160 mm
Rotor rear	Tektro airflow design ø 160 mm	Tektro airflow design ø 160 mm
Chain	KMC X10	KMC X10
Front hub	KOGA	KOGA
Rear hub	KOGA	KOGA
Tires	Schwalbe Kojak 35mm - RaceGuard: puncture protection/low rolling resistance	Schwalbe Kojak 35mm - RaceGuard: puncture protection/low rolling resistance
Tube	KOGA	KOGA
Rims	Mach 1 560	Mach 1 560
Rim tape	Hermanns innertube protective	Hermanns innertube protective
Spokes	Mach 1	Mach 1
Saddle	Selle Royal Shadow	Selle Royal Shadow
Seat post	KOGA alloy - Safety Clamp construction	KOGA alloy - Safety Clamp construction
Seat clamp	KOGA - Alloy	KOGA - Alloy
Crank set	Truvativ E400 38T	Truvativ E400 38T
Bottom bracket	Truvativ Powerspline - Sealed cartridge bearing	Truvativ Powerspline - Sealed cartridge bearing
Pedals	KOGA SoleMate - Concaved anti slip layer - Industrial bearing - ED coated body	KOGA SoleMate - Concaved anti slip layer - Industrial bearing - ED coated body
Cassette	Shimano Deore HG-62 10 speed - Hyperglide for quick and smooth shifting - Sprockets: 11-13-15-17-19-21-23-26-30-34T	Shimano Deore HG-62 10 speed - Hyperglide for quick and smooth shifting - Sprockets: 11-13-15-17-19-21-23-26-30-34T
Rear derailleur	Shimano SLX shadow - Low profile design for more aggressive riding	Shimano SLX shadow - Low profile design for more aggressive riding
Mudguard (r)	KOGA Modesto	KOGA Modesto
Gears	10	10

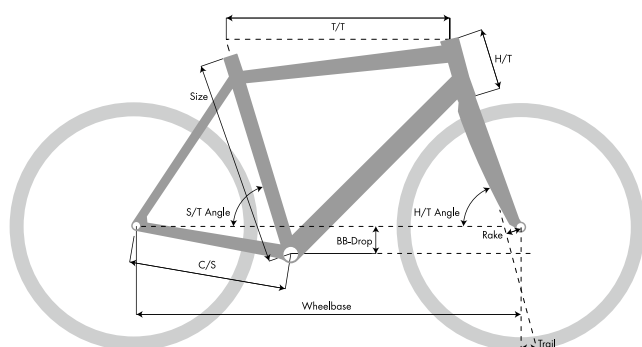

## Gents

Size	T/T	C/S	Wheelbase	BB-Drop	Rake	H/T Angle	S/T Angle	Trail	H/T	Reach	Stack
46	560	457	1058	55	45	70,5	72,0	75	100	379	558
50	575	457	1074	55	45	70,5	72,0	75	115	389	572
54	590	457	1067	55	45	71,5	71,0	68	135	385	595
57	605	457	1082	55	45	71,5	71,0	68	155	394	614
60	620	457	1097	55	45	71,5	71,0	68	180	400	638

## Mixed

Size	T/T	C/S	Wheelbase	BB-Drop	Rake	H/T Angle	S/T Angle	Trail	H/T	Reach	Stack
47	566	457	1065	55	45	70,5	72,0	75	145	371	601
50	573	457	1073	55	45	70,5	72,0	75	155	375	610
53	580	457	1080	55	45	70,5	72,0	75	165	379	619
56	587	457	1064	55	45	71,5	71,0	68	175	369	633