


## SPECIFICATIONS

<b>WEIGHT</b>	♂ 15.5 kg ♂ 15.7 kg
<b>SIZES</b>	♂ M-L-XL ♂ S-M-L
<b>COLOUR</b>	Moss Mat
<b>FRAME</b>	Super smooth welded premium 6061 aluminium with eccentric bottom bracket. Fully internal shifter, brake and lighting cables. KOGA Light Design. Integrated headset with steering limiter.
<b>FRONT FORK</b>	KOGA alloy rigid fork with integrated mudguard attachment and steering limiter
<b>HEADSET</b>	Industrial bearing - Integrated in frame
<b>HANDLEBAR</b>	KOGA Riser alloy
<b>STEM</b>	KOGA rigid with integrated cable guidance
<b>HANDLEBAR TAPE/GRIPS</b>	KOGA 2K Sport
<b>DISC-/HYDRAULIC BRAKE SET (F)</b>	Shimano MT201/UR300 hydraulic disc brake, FM type
<b>DISC-/HYDRAULIC BRAKE SET (R)</b>	Shimano MT201 hydraulic disc brake, FM type
<b>ROTOR FRONT</b>	Shimano RT-30 160mm
<b>ROTOR REAR</b>	Shimano RT-30 160mm
<b>INTERNAL GEAR HUB</b>	Shimano Nexus 8 Disc
<b>SHIFT LEVER (R)</b>	Shimano Alfine 8 S503
<b>CHAIN</b>	Gates Carbondrive CDN Belt
<b>CRANK SET</b>	Gates Carbondrive FC-S250 CDN
<b>BOTTOM BRACKET</b>	Shimano Sealed cartridge JIS
<b>CASSETTE</b>	Gates CDC 24T
<b>FRONT HUB</b>	Shutter Precision PL-7
<b>TIRE (F)</b>	Continental Contact Urban 40-622
<b>TIRE (R)</b>	Continental Contact Urban 40-622
<b>TUBE</b>	Schwalbe
<b>RIM (F)</b>	Ryde Rival21 Disc
<b>RIM (R)</b>	Ryde Rival21 Disc
<b>SPOKES</b>	Sapim Strong
<b>SADDLE</b>	Selle Royal Vivo Ergo
<b>SEAT POST</b>	LightSkin alloy with integrated rear light
<b>MUDGUARD (F)</b>	KOGA Alloy
<b>MUDGUARD (R)</b>	KOGA Alloy
<b>HEADLIGHT</b>	KOGA Integrated
<b>REAR LIGHT</b>	LightSkin seat post integrated
<b>REAR CARRIER</b>	KOGA Urban
<b>KICKSTAND</b>	Ursus Mooi
<b>BELL</b>	KOGA Compact
<b>RING LOCK</b>	AXA Victory ART ** Approved
<b>PEDALS</b>	KOGA Sole-Mate

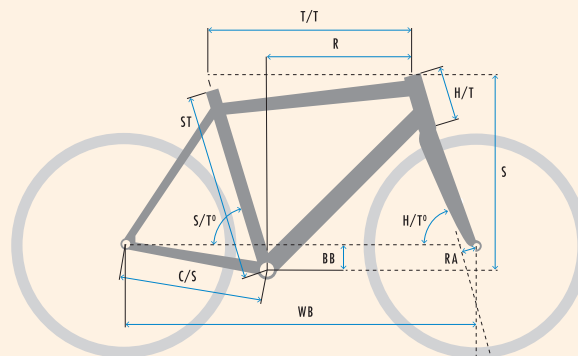

## GEOMETRY

♂ GENTS

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	H/T	R	S
M	540	615	460	1092	60	45	71.5	71.0	140	399	627
L	570	630	460	1107	60	45	71.5	71.0	155	409	641
XL	600	645	460	1122	60	45	71.5	71.0	185	415	669

♂ MIXED

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	H/T	R	S
S	500	600	460	1101	60	45	70.5	72.0	155	393	637
M	530	610	460	1112	60	45	70.5	72.0	170	399	651
L	560	620	460	1097	60	45	71.5	71.0	170	394	655